



Nozzle Heaters



- These heaters are manufactured from 1100 °C nickel-chrome wire, high grade mica, natural mica, brass profile or stainless steel profile. Heaters ends and steel knitted armour cable is connected with point welding in special connection box. Insulation is achieved by 400 °C glass fibres, macaron and special static end Stone.

- This kind of heater is ideal for working conditions up to 400 °C

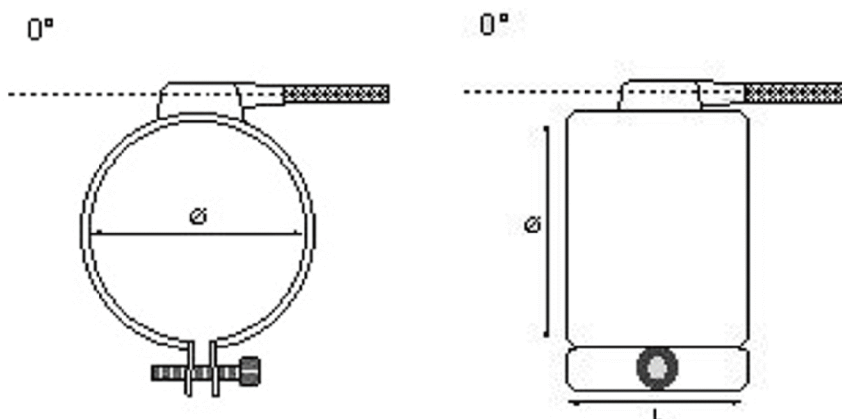

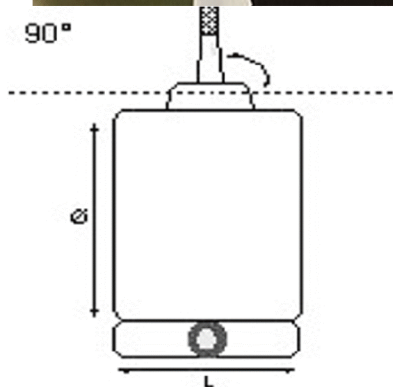

Technical Specifications:

Ø	20	25	30	35	40	45	50	55	60	70
25	70	90	100	125						
30	80	110	125	150	170					
35	90	125	150	175	200	225				
40	110	150	170	200	230	250	290	310	340	
45	125	170	200	220	260	290	320	350	380	
50	140	180	220	240	290	320	360	380	420	480
55	160	200	240	260	320	350	390	420	450	500
60	180	220	260	280	320	380	420	450	500	550
65	190	230	275	320	380	420	450	490	550	600
70	200	250	300	360	400	450	490	530	580	680
75	220	270	330	400	420	450	520	570	630	740
80	230	290	350	430	450	500	560	620	670	780
85	240	310	380	450	480	540	600	650	700	820
90	260	330	400	480	500	560	630	700	740	860

